




Easy connection of up to 31 safety sensors

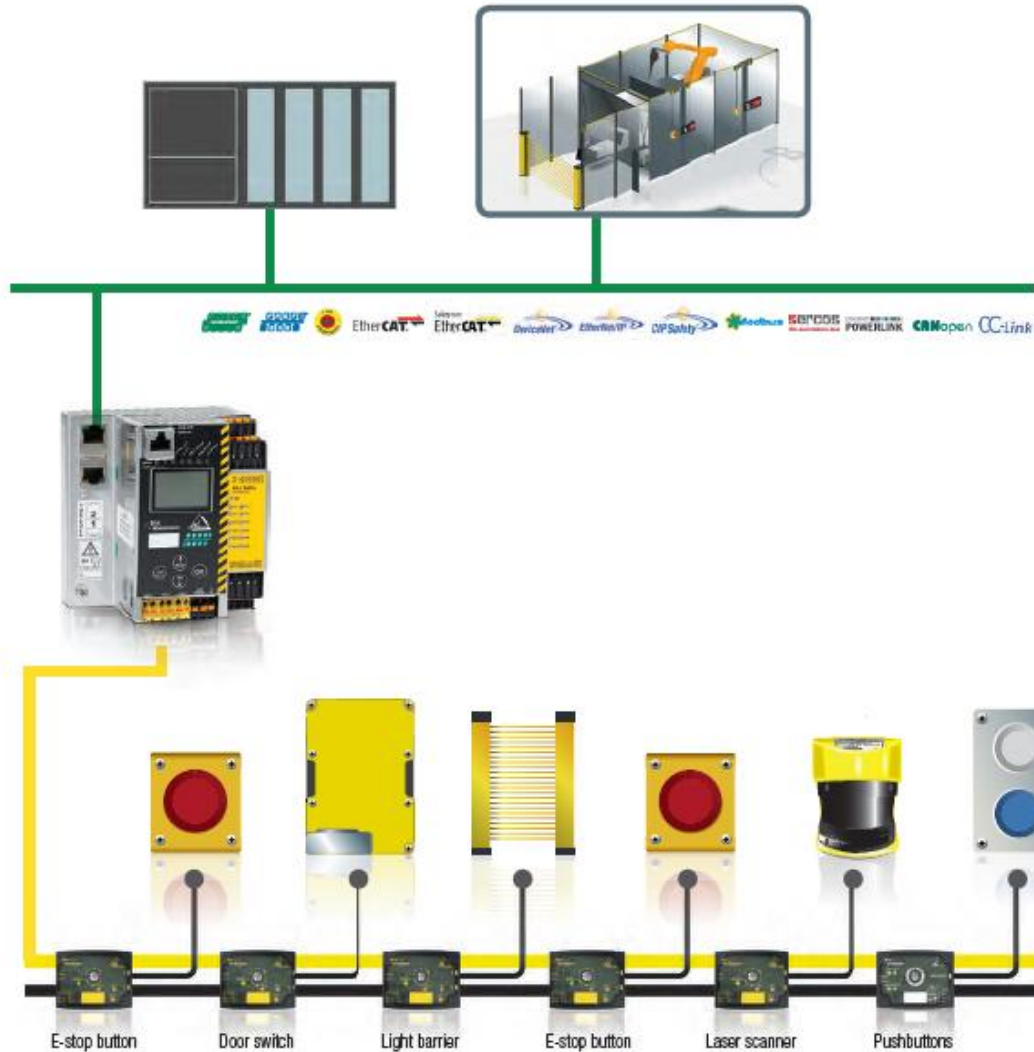

Fieldbus	Type code
	BWU2798
	BWU2793
	BWU2794
	BWU2797
	BWU3418
	BWU2972
	BWU2818
	BWU2742
	BWU2818
	BWU2588
	BWU3177
	BWU2804
	BWU2833

Application Palletizing

Application Palletizing



Safe input modules

1 x 2 channel safe input (SIL3, PLe) and 1 x standard output for:

- Optoelectronic protective devices, type code BW3376
- Floating contacts (2xNO), type code BW3248



Gateway with integrated Safety Monitor

12 terminals of the integrated Safety Monitor freely configurable, e.g.:

- as 6 safe outputs plus 3 safe 2-channel inputs, or
- as 6 safe 2-channel inputs, or
- as standard I/Os, or
- as any combination of thereof
- Type codes on page 4

Special assemblies on request



When the controller is located far from the service gate, where there is not a clear view of the safety zone, an external pushbutton must be added for resetting the gate interlock switch.

The pushbutton must be located outside the safety zone.

